

UPS for Roller Shutter Smart Battery Pack

Prevent Trapped In When Power Failure

Model: SKB-UPS600

- Input power: AC190 to AC250 Volts single phase
- Inverter output AC190 to AC220 Volts 50Hz 5.2 Ampere
- Auto connect to battery mode when input AC power is interrupted
- Battery output shall automatically cut-off after 3x detecting an overload
- Battery designed to switch On via wired wall switch and shall auto cut-off power after 120 seconds of idle operation to prevent battery to drain off
- Built-in 433Hz rolling code receiver ready to multiple handheld emitters pairing to switch On or wireless touch screen wall emitters to switch On
- Battery output automatically cuts off if short circuit occurs
- Wireless function built-in for SKB AC Motor option to connection
- Operating temperature from -18C ~ 50C


Additional:

Product warranty: 2 years from installation date. When output voltage falls below AC180V, beeping alarm will sound continuously.

Recommended to replace new batteries immediately for backup operation.

Battery Ready For All

- · Residential Staircase & Garage Shutters
- · Industrial Warehouse & Commercial Shoplot
- · High Risk Power Failure Shutter Installations
- Residential Security & Safety Shutters
- · Lift Lobby Area Shutters Installation
- Fire Shutters
- Electric Sliding Door with AC200V to AC250V
- Electric Swing Door Gear with AC200V to AC250V
- High Speed Roller Shutter with PALUS (Powerless Assist Lift Up System)
- · Electric Door Motor with AC230V and below 5Amp

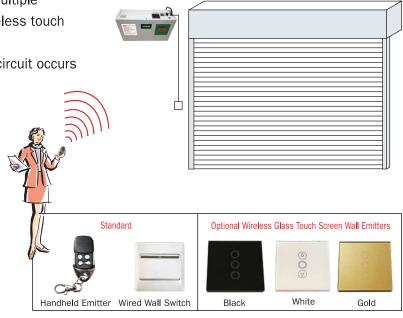




Multi-Functions Wireless Remote Control 433 MHz Rolling Code


Model: SKB-MFRC-1

- •10 Millions Auto Select Rolling Code Security
- · 433 MHz Frequency with Anti-Copying Built-In
- · Flash Light & Alarm Built-In Connect Ready
- ·Infra-Red Safety Beam Sensor Built-In Connect Ready
- · Auto Close Down Function with Timer Ready
- Bottom Bar Obstacle Wireless Emitter
 Connection Optional
- Electronic Travel Limit Function Extra to Mechanical Limit Ready
- · Safety Fuse Built-In to Prevent Overload
- Maximum Paring to 70 Emitters
- · Emitting Range to 70 Meter Open Area
- Warranty 24 Months from Date of Installation

OPTION:

Wireless Bottom Bar Safety Sensor incase hit Obstacle during closing

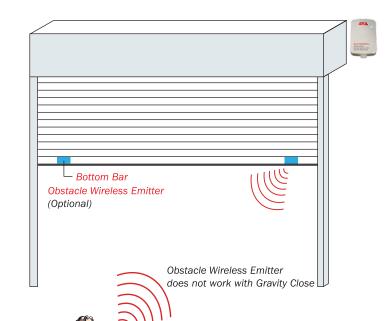



Optional Wireless Glass Touch Screen Wall Emitter











Model SKB-MFRC-1 Multi-Functions Wireless Remote Control 433 MHz Rolling Code









